

- Height : 5.4mm.
- Load life : 85°C 2000 hours.
- Non polarity series using in polarity circuits
- Corresponding product to RoHS




● SPECIFICATION

Item	Characteristic							
Operation Temperature Range	-40 ~ +85°C							
Rated Working Voltage	6.3 ~ 50VDC							
Capacitance Tolerance (120Hz 20°C)	±20%(M)							
Leakage Current (20°C)	I ≤ 0.05CV or 10 (μA) *Whichever is greater after 2 minutes				I : Leakage Current (μA) C : Rated Capacitance (μF) V : Working Voltage (V)			
Surge Voltage (20°C)	W.V.	6.3	10	16	25	35	50	
	S.V.	8	13	20	32	44	63	
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.	6.3	10	16	25	35	50	
	tan δφ	0.26	0.22	0.20	0.20	0.20	0.18	
Low Temperature Stability	Impedance ratio at 120Hz							
	Rated Voltage (V)	6.3	10	16	25	35	50	
	-25°C / +20°C	4	3	2	2	2	2	
	-40°C / +20°C	8	6	4	4	3	3	
Load Life	After 2000 hours application of W.V. and +85°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage ≤ rate working voltage) (The polarity need to exchange every 250 hours)							
	Capacitance Change	≤ ±25% of initial value						
	Dissipation Factor	≤ 200% of initial specified value						
	Leakage current	≤ initial specified value						
Shelf Life	At +85°C, no voltage application after 1000 hours, the capacitor shall meet the limits for load life characteristics. (With voltage treatment)							
Resistance to Soldering Heat	Capacitors placed on a 250°C hot plate for 30 seconds with their electrode terminals facing downward will fulfill the following conditions after being cooled to room temperature.							
	Capacitance Change	≤ ±10% of initial value						
	Dissipation Factor	≤ initial specified value						
	Leakage current	≤ initial specified value						

● DIMENSIONS (mm)

D	L	A	H	I	W	P	K
4.0	5.4	4.3	5.5MAX	1.8	0.65±0.1	1.0	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
5.0	5.4	5.3	6.5MAX	2.2	0.65±0.1	1.5	0.35 <sup>+0.15</sup> <sub>-0.20</sub>
6.3	5.4	6.6	7.8MAX	2.6	0.65±0.1	2.1	0.35 <sup>+0.15</sup> <sub>-0.20</sub>

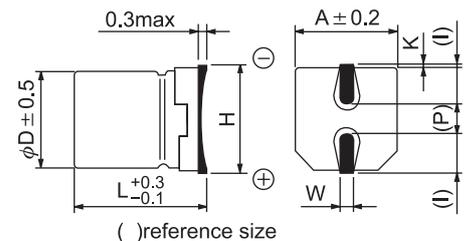

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)  
 Max ripple current : mA(rms) 85°C 120Hz

μF	V(DC) Item	6.3		10		16		25		35		50	
		DxL	R.C.										
1.0												4x5.4	7
2.2										4x5.4	10	5x5.4	12
3.3								5x5.4	13	5x5.4	14	5x5.4	14
4.7						4x5.4	14	5x5.4	16	5x5.4	17	6.3x5.4	19
10				4x5.4	19	5x5.4	23	6.3x5.4	27	6.3x5.4	28		
22		5x5.4	29	6.3x5.4	36	6.3x5.4	39						
33		6.3x5.4	41	6.3x5.4	45	6.3x5.4	48						
47		6.3x5.4	49										