

- SK series has high value of CV for general purposes.
- Corresponding product to RoHS



## ● SPECIFICATION

Item	Characteristic															
Operation Temperature Range	-40 ~ +85°C					-40 ~ +85°C					-25 ~ +85°C					
Rated Working Voltage	6.3 ~ 100VDC					160 ~ 400VDC					450VDC					
Capacitance Tolerance (120Hz 20°C)	±20%(M)															
Leakage Current (20°C)	6.3~100 VDC I ≤ 0.01CV or 4 (μA)					160~450 VDC I ≤ 0.03CV + 40 (μA)max										
	*Whichever is greater after 3 minutes I : Leakage Current(μA) C : Rated Capacitance(μF) V : Working Voltage(V)															
Surge Voltage (20°C)	W.V.	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	
	S.V.	8	13	20	32	44	63	79	125	200	250	300	400	450	500	
Dissipation Factor (tan δ) (120Hz 20°C)	Add 0.02 per 1000 μF for more than 1000 μF															
	W.V.	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	
	tan δ	0.22	0.19	0.16	0.14	0.12	0.10	0.10	0.08	0.15	0.15	0.15	0.20	0.20	0.20	
Low Temperature Stability	Impedance ratio at 120Hz															
	Rated Voltage (V)	6.3		10		16		25		35~100		160~250		350~400		450
	-25°C / +20°C	4		3		2		2		2		3		6		15
	-40°C / +20°C	8		6		4		3		3		6		6		—
Load Life	After 2000 hours application of W.V. and +85°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage ≤ rate working voltage)															
	Capacitance Change	≤ ±20% of initial value														
	Dissipation Factor	≤ 150% of initial specified value														
	Leakage current	≤ initial specified value														
Shelf Life	At +85°C no voltage application after 1000 hours the capacitor shall meet the following limits. (with voltage treatment)															
	Capacitance Change	≤ ±20% of initial value														
	Dissipation Factor	≤ 200% of initial specified value														
	Leakage current	≤ 200% of initial specified value														


## ● DIMENSIONS (mm)

φD	5	6.3	8	10	12.5	16	18	22	25
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	12.5
d	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0
α	1.5	1.5	1.5	1.5	2.0	2.0	2.0	2.0	2.0

## ● RIPPLE CURRENT COEFFICIENTS

Temperature(°C)	65	75	85
Multiplier	1.25	1.14	1.00

Frequency(Hz)	60	120	1k	≥10k
W.V.	Multiplier			
6.3~25V	0.85	1.00	1.10	1.20
35~100V	0.80	1.00	1.15	1.25
160~250V	0.75	1.00	1.25	1.40
350~450V	0.70	1.00	1.30	1.50

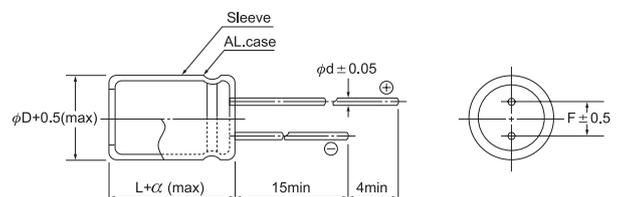

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)  
Max ripple current : mA(rms) 85°C 120Hz

μF	V(DC) Item	6.3		10		16	
		DxL	R.C.	DxL	R.C.	DxL	R.C.
47					→	5x11	130
100		5x11	160	5x11	170	6.3x11	210
220		5x11	240	5x11	250	6.3x11	310
		6.3x11	270	6.3x11	290	8x11	370
330		6.3x11	330	6.3x11	350	8x11	450
		8x11	380	8x11	410	10x12.5	470
470		6.3x11	390	6.3x11	420	8x11	540
		8x11	460	8x11	490	10x12.5	560
1000		8x11	670	10x12.5	760	10x16	920
		10x12.5	700	10x16	840	10x20	1010
2200		10x16	1110	10x20	1310	12.5x20	1510
		10x20	1220	12.5x20	1390	12.5x25	1660
3300		10x20	1440	12.5x20	1630	12.5x25	1930
		12.5x20	1530	12.5x25	1800	16x25	1940
4700		12.5x20	1730	12.5x25	2020	16x25	2160
		12.5x25	1910	16x25	2030	16x32	2390
6800		12.5x25	2160	16x25	2270	16x32	2650
		16x25	2170	16x32	2510	18x36	2980
8200		16x25	2280	16x32	2630	16x36	2910
		16x32	2520	18x36	2960	18x40	3280
10000		16x25	2390	16x36	2900	18x36	3230
		16x32	2640	18x36	3090	18x40	3400
15000		16x36	3050	18x36	3360	22x40	4090
		18x36	3260	18x40	3540	22x50	4520
22000		18x40	3680	22x50	4650	25x50	5120

μF	V(DC) Item	25		35		50	
		DxL	R.C.	DxL	R.C.	DxL	R.C.
10		5x11	60	5x11	70	5x11	75
22		5x11	95	5x11	100	5x11	110
33		5x11	110	5x11	120	5x11	140
		6.3x11	130	6.3x11	140	6.3x11	150
47		5x11	140	5x11	150	6.3x11	180
		6.3x11	160	6.3x11	170	8x11	210
100		6.3x11	230	6.3x11	240	8x11	310
		8x11	260	8x11	290	10x12.5	330
220		8x11	390	8x11	420	10x12.5	490
		10x12.5	410	10x12.5	450	10x16	540
330		8x11	480	10x12.5	550	10x16	670
		10x12.5	510	10x16	610	10x20	730
470		10x12.5	600	10x16	720	10x20	820
		10x16	670	10x20	800	12.5x20	930
1000		10x20	1080	12.5x20	1240	12.5x25	1500
		12.5x20	1150	12.5x25	1370	16x25	1510
2200		12.5x25	1760	16x25	1890	16x36	2390
		16x25	1770	16x32	2090	18x36	2550
3300		16x25	2040	16x36	2530	18x36	2890
		16x32	2260	18x36	2700	18x40	3050
4700		16x32	2500	18x36	2960	22x45	3880
		18x36	2810	18x40	3120		
6800		18x36	3100	22x45	4020		
		18x40	3270			25x50	4730
8200		22x45	4000	22x50	4350		
10000		22x50	4330	25x50	4800		
15000		25x50	4970				

All blank voltage on sleeve marking is the same voltage as " → " point to.

● **CASE SIZE & MAX RIPPLE CURRENT** Case size : D x L (mm)  
Max ripple current : mA(rms) 85°C 120Hz

μF	V(DC) Item	63		100	
		DxL	R.C.	DxL	R.C.
10		5x11	75	6.3x11	95
22		5x11	110	6.3x11	140
		6.3x11	130	8x11	160
33		6.3x11	150	8x11	200
		8x11	180	10x12.5	210
47		6.3x11	180	10x12.5	250
		8x11	210	10x16	280
100		10x12.5	330	10x20	450
		10x16	370	12.5x20	480
220		10x16	540	12.5x25	790
		10x20	600	16x25	790
330		10x20	730	12.5x25	960
		12.5x20	780	16x25	970
470		12.5x20	930	16x25	1160
		12.5x25	1030	16x32	1280
1000		16x25	1510	18x40	2220
		16x32	1670	22x35	2340
2200		22x35	2830	25x50	3900
3300		22x50	3760		
4700		25x50	4370		

μF	V(DC) Item	160		200		250	
		DxL	R.C.	DxL	R.C.	DxL	R.C.
1		6.3x11	25	6.3x11	27	6.3x11	29
2.2		6.3x11	37	6.3x11	39	6.3x11	43
3.3		6.3x11	45	6.3x11	48	8x11	60
4.7		6.3x11	55	8x11	65	8x11	75
10		8x11	90	10x12.5	100	10x16	120
22		10x16	160	10x20	190	12.5x20	220
33		10x20	210	12.5x20	250	12.5x20	270
47		12.5x20	270	12.5x20	290	12.5x25	350
100		12.5x25	440	16x25	470	16x32	570
220		16x36	760	18x40	920		
		22x30	850	22x30	910	22x35	1060
330		18x40	1050				
		22x30	1040	22x40	1260	22x45	1450
470		22x40	1400	22x45	1590	25x45	1850
560		22x45	1610	22x50	1820	25x50	2120
680		22x50	1860	25x50	2150		
820		25x50	2200				

μF	V(DC) Item	350		400		450	
		DxL	R.C.	DxL	R.C.	DxL	R.C.
1		8x11	29	8x11	30	8x11	29
2.2		8x11	43	8x11	44	10x12.5	45
3.3		10x12.5	55	10x12.5	55	10x16	60
4.7		10x12.5	65	10x16	75	10x18	75
10		10x20	120	12.5x20	130	12.5x20	130
22		12.5x20	190	12.5x25	210	16x25	210
33		12.5x25	250	16x25	260	16x32	280
		16x25	300	16x32	350	18x36	380
47				22x30	410		
		18x36	550	18x36	570	18x36	550
100		22x35	610	22x40	670		
		22x40	790	25x50	970		
220		22x50	1060				

RADIAL TYPE